


**[SIGNAL TYPE]**  
 PIPELINE TRANSMITTER  
 MODEL - WT-D3-TR  
 SER. # D3TR-XXXX

MANUFACTURED BY  
 WAVETRAK ELECTRONICS LTD  
 EDMONTON, AB CANADA  
 CDN PATENT # 2242390  
 USA PATENT # 6088580

SCALE 1 / 2

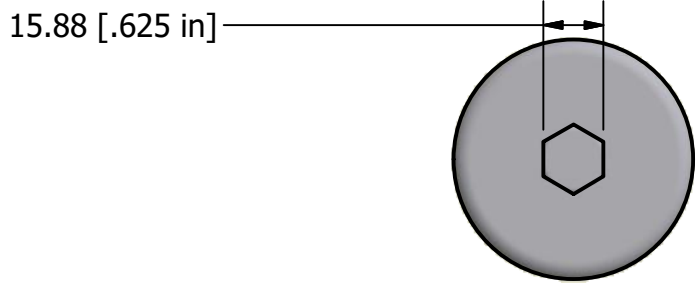

**SPECIFICATIONS**

Battery Type	2x D (LR20) Cell Alkaline Batteries
Operating Temperature	-20° C to +50° C (-4 °F to 122 °F)
Maximum Operating pressure	2500 psi (172 bar)
O-Ring type and Size	2x 2-137/V90 (Viton O-ring)
Run time in Continuous Mode	125 + hours
Runtime in Pulse Mode	150 + hours
Open air signal strength	10 meters (33 feet)
In-Pipe signal strength	6 meters (19 feet)
Delrin Can part number	WT-D3-can

**Note:**

Open air test and in-pipe tests are carried out with a factory test receiver at full gain and external antenna connected. In-pipe test is performed by placing transmitter inside a 1/2" thick pipe.

**Duracell - Procell ALKALINE batteries are strongly recommended in order to get the most run time on our transmitters.**

Drawn by:	PM	
Revision Date:	2018-03-16	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WAVETRAK ELECTRONICS LTD., ANY PRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF WAVETRAK ELECTRONICS IS PROHIBITED.		<b>TITLE</b> <b>WT-D3-TR Spec Sheet</b>
UNITS	REV	SHEET
mm [inches]	4	1